

EFNOTE 3
EFNOTE 5

Firmware Update
Guide



Firmware update procedure for EFNOTE 3 / 5 Series

* About the operation of your computer, please refer to its manual.

SYSTEM REQUIREMENTS

OS

Microsoft Windows 10
Mac OS 10.13 (High Sierra), 10.14 (Mojave), 10.15 (Catalina)

PC/Mac

Computer equipped with USB port (USB 2.0 high speed or faster)

- * For Windows PC, Intel chipset is recommended.
- * A virtual environment is not supported.
- * Windows running on a Mac is not supported.
- * The USB connectivity is not guaranteed for all environments. Some computers may not be fully compatible.
- * A micro-USB cable (not included) is needed to connect.

Updating

WARNING

DO NOT SHUT THE SOUND MODULE POWER OFF WHILE UPDATING.

If the power is cut off during the update, there is a risk that the sound module will never turn on. In this case, you will be charged for the repair.

- 1 Turn the sound module on, and connect the sound module to your PC/Mac with a USB cable.
- 2 Open the "EFNOTE Update Tool" app.

The app is available on our website. (p. 4)


Windows

If the "Windows protected your PC" message is popped up, click "More info" and "Run anyway".



- 3 The app starts connecting to the sound module.


If the connection is established, the status shows "Device connected," and the sound module shows following screen.

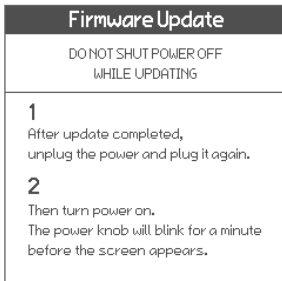

- 4 Click [File...], and select the new firmware file "EFD-x-FIRM.rom" that you downloaded.




If the file you selected is not supported with the sound module, following screen is popped up. Select a correct file.

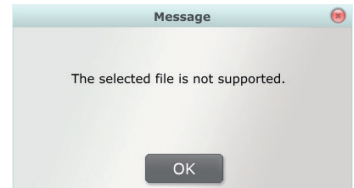

- 5 Now, ready to update. Click [Execute].




- 6 The confirmation screen is popped up. Click [Yes] to proceed.

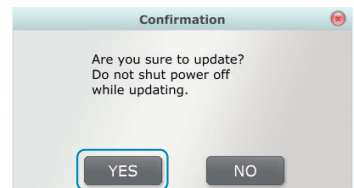


The update starts.

- * Do not shut the sound module power off while updating.
- * Do not try to cancel the update.
- * If you got any trouble with your computer during the update, keep the sound module as it is, and restart your computer. Then, try again from the step 2.

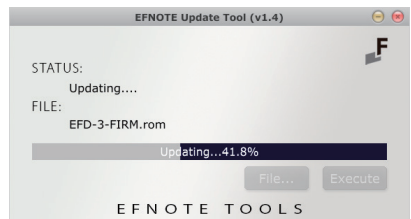

**After the status shows
"Update completed successfully" ...**

7 Close the app.


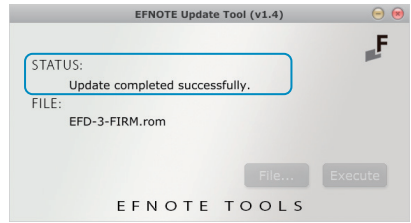


8 Unplug the AC adapter from the sound module, and plug it again.

9 Turn the sound module on.

The ring illumination LED starts blinking.
(The screen is not displayed)

After a while, the display shows following screen.

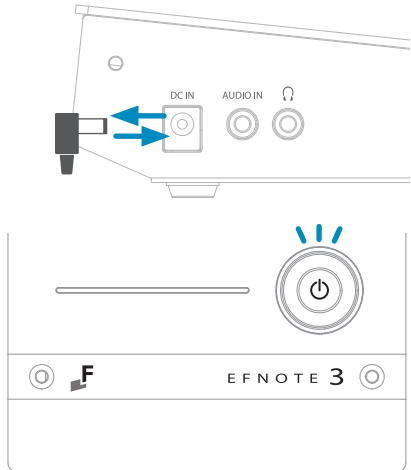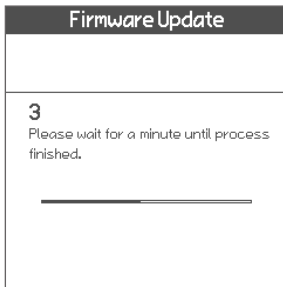

When the process is finished, the home screen is displayed.
The update is completed.

For the latest information, please refer to the EFNOTE 3/5 website.

ef-note.com/products/drums/EFNOTE3/
ef-note.com/products/drums/EFNOTE5/



* Specification and design are subject to change without prior notice.

* Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation.

* Mac is trademarks of Apple Inc., registered in the U.S. and other countries.

* Company names or product names etc. appearing in this document are the registered trademarks or trademarks of their respective corporate owners.